
ELKAY®

Outdoor Bottle Filler Dog Bowl Accessory
For Use On 4400 Non Freeze resistant Series Fountains
With Floor Mount Base

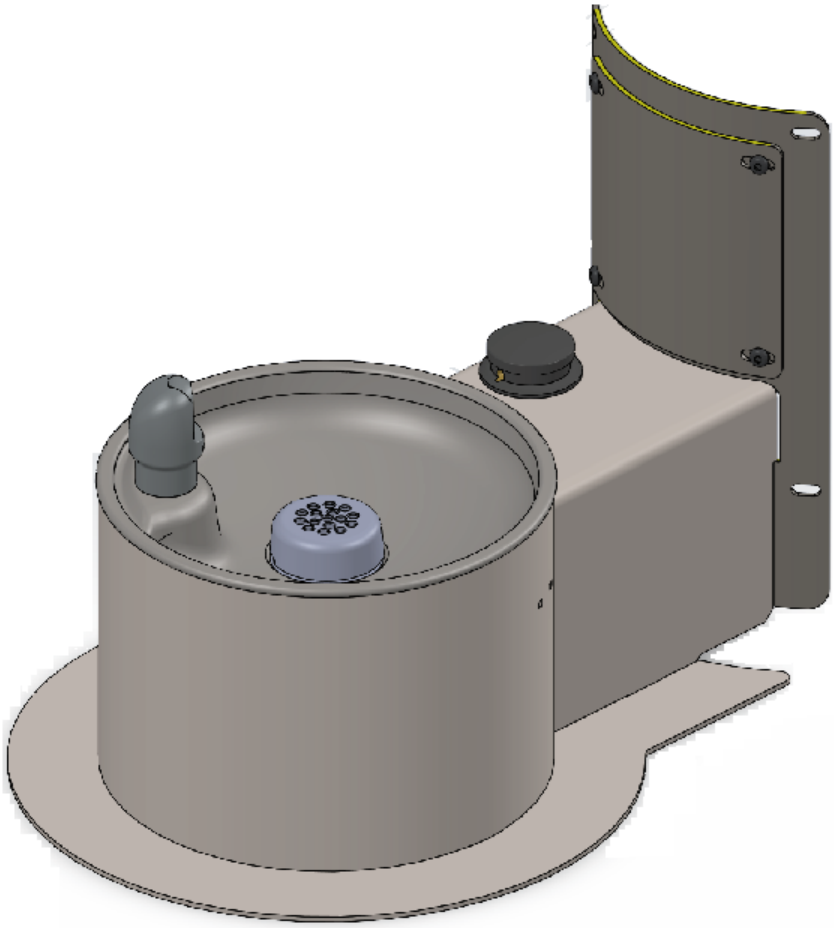

INSTALLER

To assure you install this accessory easily and correctly, PLEASE READ THESE SIMPLE INSTRUCTIONS BEFORE STARTING THE INSTALLATION. CHECK YOUR INSTALLATION FOR COMPLIANCE WITH PLUMBING, ELECTRICAL AND OTHER APPLICABLE CODES.

2000002781

2000002781 (Rev. B - 10/26)

INSTALLATION INSTRUCTIONS

1. Shut off the water to the fountain. Press the push button(s) to relieve the pressure from the unit.
2. Using the supplied T-27 torx head bit and a bit holder, remove the 8 screws securing the lower and upper access panels located on the side of the fountain and the upper access panel on the dog bowl. See Fig.4 and 3.

   Note: Dog bowl will replace the lower access panel. Keep the access panel that has the serial data label for step 11.
3. Align the dog bowl with the access panel opening and insert the top two screws.

   Note: if the dog bowl will not fit over existing fountain mounting studs, they will need to be removed to allow room for the accessory.
4. Mark the four mounting hole locations in the baseplate of the dog bowl. The dog bowl should be installed using 3/8” minimum fasteners. (Fasteners not furnished). Once the locations are marked remove the dog bowl to make drain and water connections.
5. Turn the dog bowl over and install the supplied drain into the drain elbow and tighten the nut See Fig. 6.
6. **If adding this accessory to an existing fountain:** Through the lower access panel opening in the fountain, locate the drain assembly and cut the fountain drain (6” from the ground) to insert the supplied drain tee.

   If adding this accessory while installing a new fountain: Through the lower access panel opening in the fountain, connect the fountain drain to the the drain tee supplied with the dog bowl (installer will supply drain components needed to make this connection).
7. Through the lower access panel opening, locate the 3/8” water inlet copper tube at the bottom of the fountain and cut it, leaving enough on both sides to insert the supplied 3/8” Tee. Insert the supplied 3/8 tee.
8. Connect the copper tube at the end of the water line coming from the dog bowl to the open connection on the tee that was installed in step 7 (See fig. 5).
9. Slide the dog bowl into position making sure that the drain lines up with the earlier installed tee. Reach through the access panel on the accessory and tighten the nut on the tee.
10. Turn on the main water supply. Check for leaks and ensure proper function of the dog bowl and existing push buttons. If there are leaks, turn off the water supply and correct the water leaks as required.
11. After ensuring that all connections are leak free, leave the main water supply on. Replace upper access panel with 4 of the 8 screws removed earlier, ensuring that the serial data label is present. Secure the dog bowl body to the fountain body with 4 of the 8 screws removed in step 2. Use the 27 torx head bit and a bit holder to tighten. Install the access panel to the dog bowl using the screws and torx head bit See Fig.3.
12. Secure the dog bowl to the ground through the holes in the base plate.
13. Installation of dog bowl is complete.

Note: See Fig.3 and Fig.4 for Details A and B Panel(s) Installation

TOOLS REQUIRED (NOT PROVIDED)

1. Gloves
2. Safety Glasses
3. Tubing Cutter
4. Utility knife
5. Bit holder

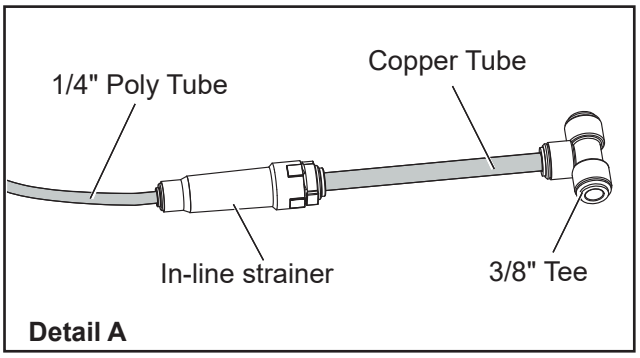


Fig. 1

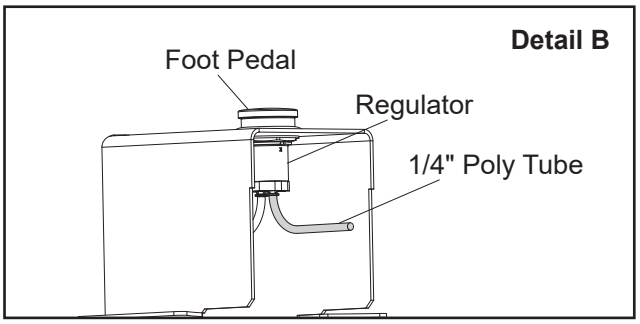


Fig. 2

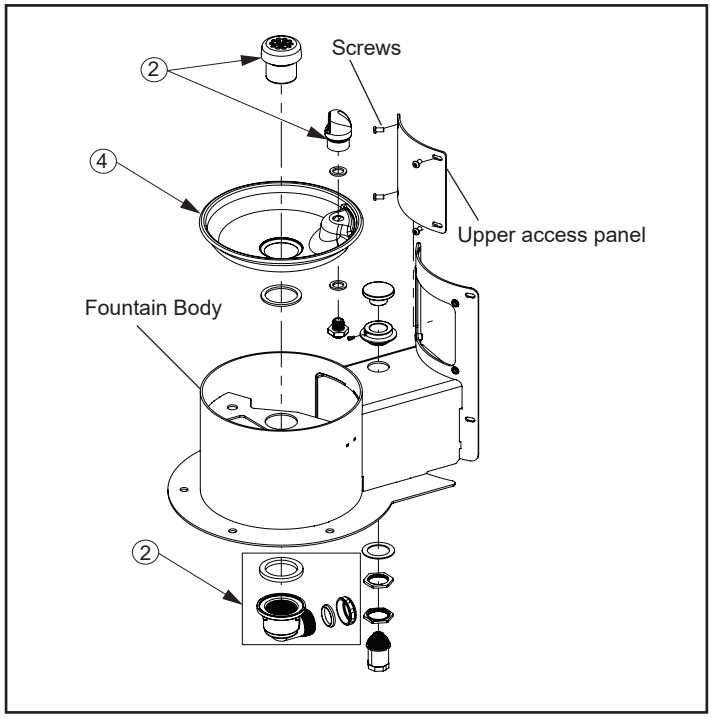


Fig. 3

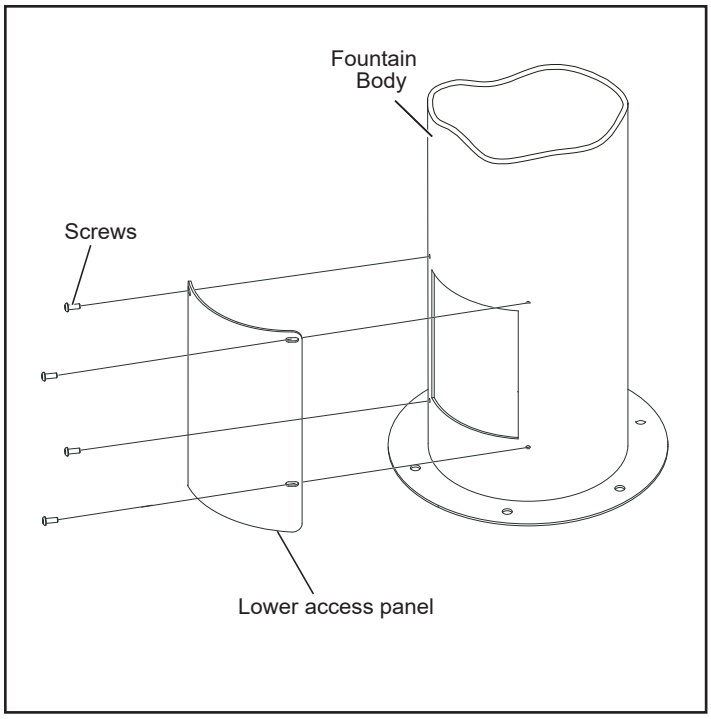


Fig. 4

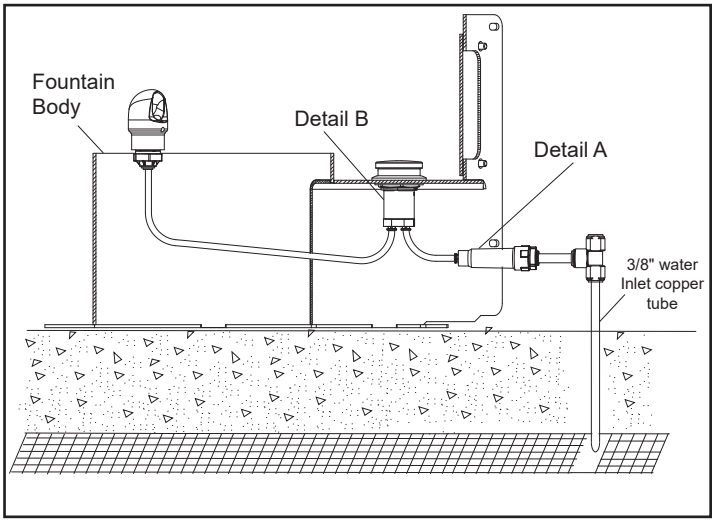


Fig. 5


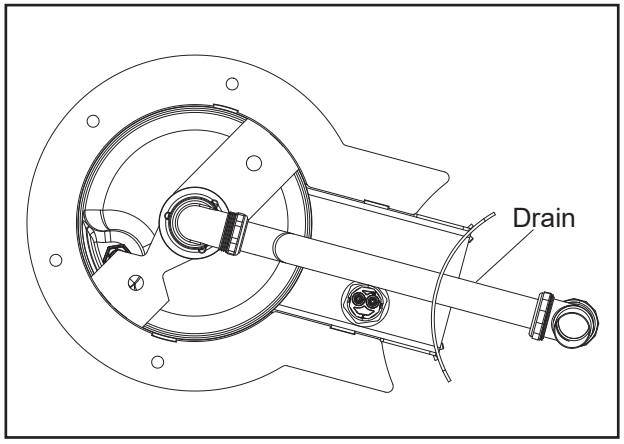


Fig. 6

REPLACEMENT PARTS LIST		
ITEM NO.	PART NO.	DESCRIPTION
1	2000003044	Cooler Hardware Kit
2	2000003046	Outdoor Fountain Dog Bowl Kit
3	2000002504	Kit- Regulator- Push Button
4	28467C	Basin-Tubular Fountain

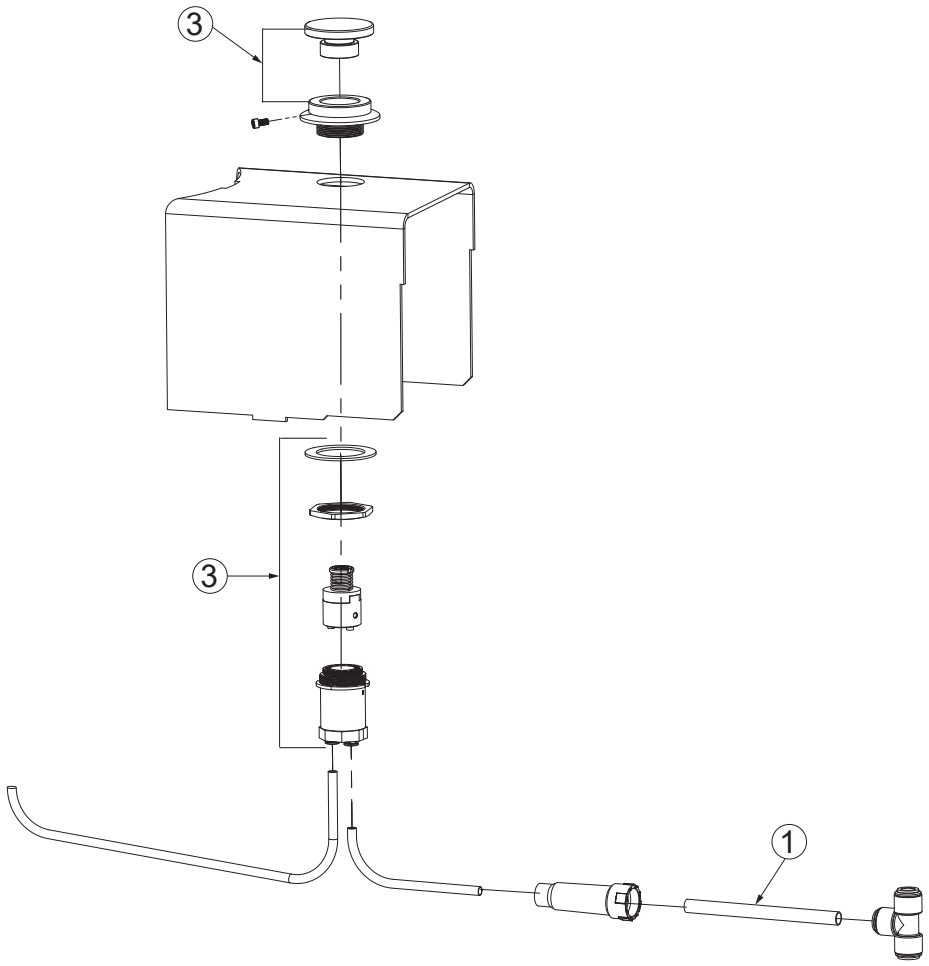

Dog Bowl Exploded View

Patent zurnelkay.com/patents

PRINTED IN U.S.A.

REPAIR SERVICE INFORMATION TOLL FREE NUMBER 1.800.260.6640
FOR PARTS, CONTACT YOUR LOCAL DISTRIBUTOR OR CALL 1.800.834.4816
ELKAY MANUFACTURING Co. • 1333 BUTTERFIELD ROAD SUITE 200 • DOWNERS GROVE • IL 60515 • USA 630.574.8484 • www.elkay.com