

PRODUCT SPECIFICATIONS

Finish:	Light Gray Granite
Sink Dimensions:	18" x 18-3/4" x 23-7/8"



Included with Product: Water Cooler

A Century of Tradition and Quality.

For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.





Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

<u>Installation Instructions (PDF) - 98589C</u> Warranty (PDF)

PART:	QTY:
PROJECT:	
NOTES:	
APPROVAL:	

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



97446C

Bubbler Kit Vandal-Resistant

Spec Sheet (PDF)



Open space rough-in design permits new installation or replacement of existing fountains and coolers with this Elkay cooler when rough-in is within the outline shown.

IMPORTANT! INSTALLER PLEASE NOTE:


This water cooler has been designed and built to provide water to the user which has not been altered by materials in the cooler waterways.

The grounding of electrical equipment such as telephone, computers, etc to water lines is a common procedure. This grounding may be in the building or occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which creates a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by installing the cooler using the proper materials as shown below.

NOTICE

The water cooler must be connected to the water supply using a dielectric coupling. The cooler is furnished with a non-metallic strainer which meets this requirement. The drain trap which is provided by the installer should also be plastic to completely isolate the cooler from the building plumbing system.

OPERATION OF QUICK CONNECT FITTINGS Simply push in |Tube is secured |Push in collet to tube to attach release tube in position - 0107 777/ Pushing tube in before pulling it out helps to release tube 1/4" O.D. tube 3/8" O.D. Tube connect Building water water inlet to cold water supply inlet cooler Servicé stop NOTE: Waterflow (Not furnished) direction

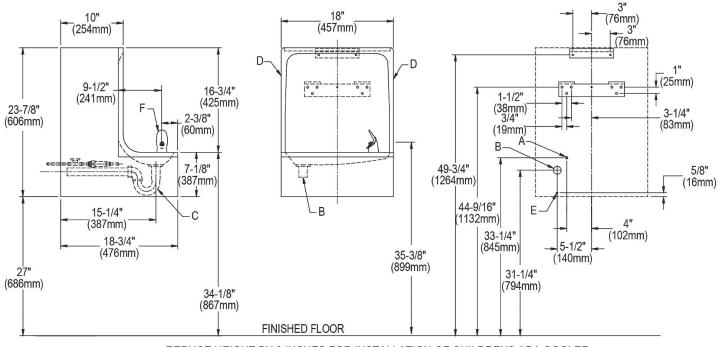

REDUCE HEIGHT BY 3 INCHES FOR INSTALLATION OF CHILDRENS ADA COOLER

LEGEND

- A = Recommended water supply location. Shut off valve (not furnished) to accept 3/8" O.D. unplated copper tube connect.
- B = Recommended location for waste outlet 1-1/4" O.D. drain.
- C = 1-1/4" Trap not furnished.
 D = Insure proper ventilation by maintaining 6" (152mm) (min.) clearance from cabinet louvers to wall
- E = This bolt hole must be used for fastening unit to wall.
- F = Orifice height 1-1/4" (32mm) above rim.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.