Elkay Wall Mount Fully Recessed Cuspidor Non-Filtered Non-Refrigerated Stainless Steel

Model EDFBC12PBC

PRODUCT SPECIFICATIONS

Elkay Wall Mount Fully Recessed Cuspidor Non-Filtered Non-Refrigerated Stainless Steel. Product shall be Recessed Mount, for Indoor + Outdoor applications, serving 1 station(s).

Finish:	Stainless Steel (S)	
Power:	No Electrical Required	
Bubbler Style:	No Bubbler	
Mounting Type:	Recessed Mount	
Chilling Capacity:	Non-refrigerated	
Dimensions (L x W x H):	19" x 11-3/16" x 32-1/2"	
Approx. Shipping Weight:	29 lbs.	
Installation Location:	Indoor + Outdoor	
No. of Stations Served:	1	

^{**}When used in non-temperature controlled environments, unit(s) must be adequately winterized and/or protected from extreme heat to prevent damage where climates dictate.



Included with Product: Cuspidor Ships in one box.

A Century of Tradition and Quality. For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.



PRODUCT COMPLIANCE

ASME A112.19.3/CSA B45.4

Buy American Act



Installation Instructions (PDF) - 97164C

Water Systems are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty. Warranty (PDF)

PART:	QTY:	
PROJECT:		
CONTACT:		
DATE:		
NOTES:		
APPROVAL:		

In keeping with our policy of continuing product improvement, reserves the right to change product specifications without notice. Please visit for the most current version of product specification sheets. This specification describes product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.







Optional Accessories Elkay Access Panel 9" x 9" x 6" AP99 Spec Sheet (PDF)


INSTALLER NOTE

This drinking fountain is furnished with a bubbler and valve including all connecting fittings which are manufactured of completely lead free material. Shut off valve (not furnished) to accept 3/8" O.D. unplated copper tube.

OPERATION OF QUICK CONNECT FITTINGS





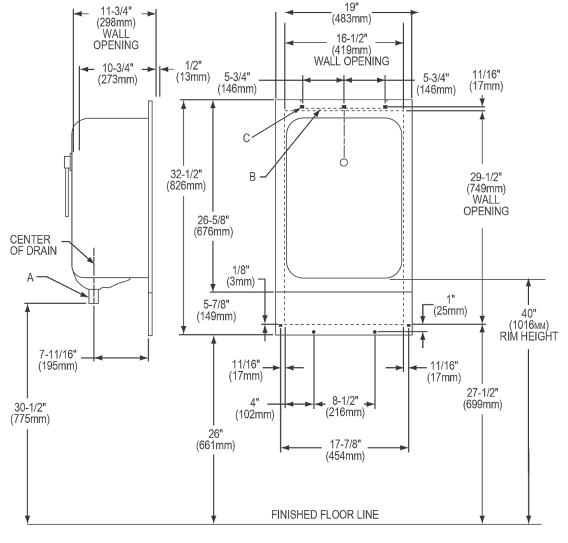

LEGEND FOR LEFT FOUNTAIN:

A = Cuspidor waste outlet location.

1-1/4" (32mm) O.D. drain (trap not furnished).

B = Wall hanger - 12" (305mm) x 1" (25mm) furnished loose.

C = Mounting holes for 1/4" Ø (6mm) screws.

In keeping with our policy of continuing product improvement, reserves the right to change product specifications without notice. Please visit for the most current version of product specification sheets. This specification describes product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.