# HydroBoost® Bottle Filling Station & Single ADA Cooler High Efficiency Filtered Refrigerated Stainless Model HTHB-HACG8SS-WF

### PRODUCT SPECIFICATIONS

HydroBoost® Bottle Filling Station & Single ADA Cooler High Efficiency Filtered Refrigerated Stainless. Chilling Capacity of 8.0 GPH (gallons per hour) of 50° F drinking water, based on 80° F inlet water and 90° F ambient, per ASHRAE 18 testing. Features shall include Antimicrobial\*, Filtered, Green Counter™, High Efficiency, Laminar Flow, Real Drain, Sanitary Sensor Activated, Visual Filter Monitor. Furnished with Double Bubbler ™. Electronic Bottle Filler Sensor with Mechanical Front and Side Bubbler Pushbar activation. Product shall be Wall Mount (On Wall), for Indoor applications, serving 1 station(s). Unit shall be certified to UL 399 and CAN/CSA C22.2 No. 120.

Special Features:	Antimicrobial, Filtered, Green	
	Counter™, High Efficiency, Laminar	
	Flow, Real Drain, Sanitary Sensor	
	Activated, Visual Filter Monitor	
Finish:	Stainless Steel	
Power:	115V/60Hz	
Bubbler Style:	Double Bubbler ™	
Activation by:	Electronic Bottle Filler Sensor with	
	Mechanical Front and Side Bubbler	
	Pushbar	
Mounting Type:	Wall Mount (On Wall)	
Chilling Capacity*:	8.0 GPH	
Full Load Amps	6	
Rated Watts:	260	
Dimensions (L x W x H):	18" x 18-1/2" x 39-9/16"	
Approx. Shipping Weight:	75 lbs.	
Installation Location:	Indoor	
No. of Stations Served:	1	
+Rasad on 80° E inlot water 8 00° E ambient air temp for 50° E chilled		

\*Based on 80° F inlet water & 90° F ambient air temp for 50° F chilled drinking water.

- Mechanically-Activated unit continues to supply water in event of service disruptions.
- Touchless, sensor-activated units are designed for easy use.
- Visual Filter Monitor: LED Filter Status Indicator for when filter change is necessary.
- Standard Filter Included: Filter is tested and certified to NSF/ANSI
  42, 53, 372 and 401 for the reduction of lead, microplastics, Class 1
  particulate, cysts, and chlorine taste and odor. 3,000 gallon
  capacity or 1 year after installation.
- High-performance compressor and insulation greatly reduce energy consumption.
- Green Counter: Informs user of number of 20 oz. plastic water bottles saved from waste.

PART:	QTY:
PROJECT:	
CONTACT:	
DATE:	
NOTES:	
ADDROVAL:	

Laminar flow provides clean fill with minimal splash.

mal splash.



**Included with Product:** 

Water Cooler (CLR-HBHACG8SSWF),

Filter,

**Bottle Filler (HTHB-HAC)** 

### **▼** Ships in multiple boxes.

A Century of Tradition and Quality. For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.



### PRODUCT COMPLIANCE

ADA & ICC A117.1

ASME A112.19.3/CSA B45.4

CAN/CSA C22.2 No. 120

GreenSpec®

NSF/ANSI 42, 53, 61 (Q≤1), 372 (lead free), & 401 UL 399









Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.

Installation Instructions (PDF) - 1000001715

**5 Year Limited Warranty** on the refrigeration system of the unit. Electrical components and water system are warranted for 12 months from date of installation. **Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.** 

Warranty (PDF)

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design,

quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

# HydroBoost® Bottle Filling Station & Single ADA Cooler High Efficiency Filtered Refrigerated Stainless Model HTHB-HACG8SS-WF

- Key plastic components are manufactured with silver ion antimicrobial agent helping to provide clean, stain- and odor-free surfaces.
- · Real Drain System eliminates standing water.
- Exclusive Double Bubbler which projects two separate streams that converge to form a fuller, more satisfying drink.
- \*Antimicrobial claims are in refence to components manufactured antimicrobial agents, helping to provide clean, stain- and odor-free surfaces.

### **COOLING SYSTEM**


- Compressor: Hermetically-sealed, reciprocating type, single phase. Sealed-in lifetime lubrication.
- Condenser: Fan cooled, copper tube with aluminum fins. Fan motor is permanently lubricated.
- Cooling Unit: Combination tube-tank type. Continuous copper tubing with is fully insulated with EPS foam that meets UL requirements for self-extinguishing material.
- Refrigerant Control: Refrigerant R-134a is controlled by accurately calibrated capillary tube.
- Refrigerant Control: Refrigerant HFC-134a is controlled by accurately calibrated capillary tube for positively trouble-free operation.
- Temperature Control: Easily accessible enclosed adjustable thermostat is factory preset. Requires no adjustment other than for altitude requirements.

Optional Accessories		
<u>55898C</u>	WaterSentry® Replacement Filter (Bottle Fillers)  Spec Sheet (PDF)	
<u>MLP100</u>	In-wall Carrier for Single-station On-wall Bottle Fillers Coolers & Fountains  Spec Sheet (PDF)	
<u>98324C</u>	Cane Apron for HAC HVR EMABF & VRC Models (Stainless)  Spec Sheet (PDF)	

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

### HydroBoost® Bottle Filling Station & Single ADA Cooler High Efficiency Filtered Refrigerated Stainless

### Model HTHB-HACG8SS-WF

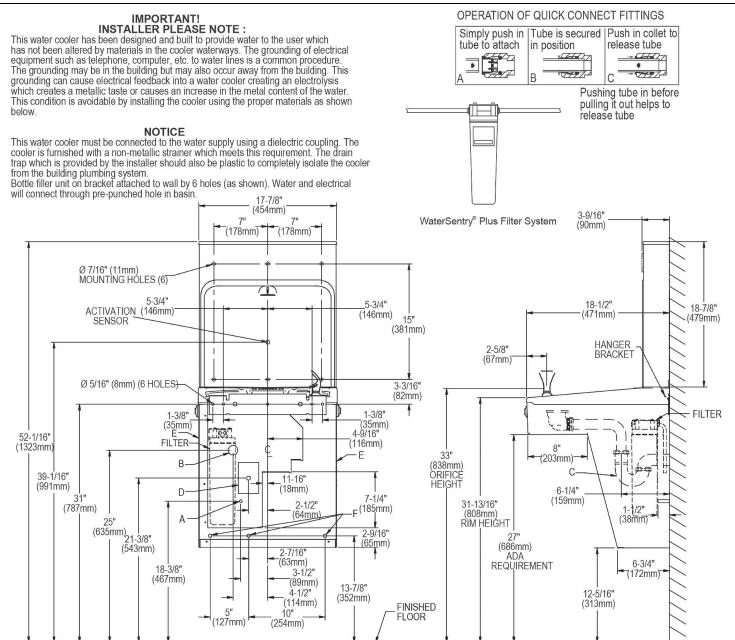

### LEGEND:

A = Recommended Water Supply location. Shut-off Valve (not furnished) to accept 3/8" O.D. unplated copper tube. Up to 3" (76mm) maximum out from wall.

REDUCE HEIGHT BY 3 INCHES FOR INSTALLATION OF CHILDRENS ADA COOLER

B = Recommended Waste Outlet location. To accommodate 1-1/4" nominal drain. Drain stub 2" (51mm) out from wall.

C = 1-1/4" Trap (not furnished).

D = Electrical Supply (3) Wire Recessed Box Duplex Outlet.

= Insure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.

F = 7/16" (11mm) Bolt Holes for fastening to wall

NOTE: New Installations Must Use Ground Fault Circuit Interrupter (GFCI).

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.