


Attention Installer:

- Elkay recommends that undermount sinks should be installed by a professional, experienced installer.
- Enclosed in the sink carton is a cutout template that can be used to make the countertop cutout with an approximately 1/8" sink rim reveal. Your installer may also retrieve the desired DXF file from our website, www.elkay.com.
- It is recommended that the customer and installer discuss the desired finished appearance of the sink and countertop installation. Elkay is not responsible for improper sink and/or countertop installations.
- Elkay undermount sinks should only be fastened to a solid surface countertop (i.e. granite / Corian Elkay recommends that the sink cutout and mounting holes be done by the countertop fabricator®).
- prior to installation.
- Elkay is not responsible for the sink or countertop if damaged during installation.
- Follow all local plumbing and building codes.
- Inspect sink for damage prior to beginning installation.

Installation Profile

UNDERMOUNT - 1/8" REVEAL

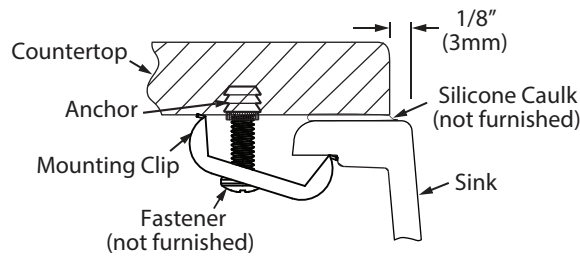

Designed to affix to the underside of any solid surface countertop.

Required Tools (not included)



Installation




WARNING: Always wear safety goggles and gloves when using power tools or handling the sink to prevent personal injury.

- 1 Use included cutout template to cut opening into countertop





- 2 Fasten the mounting brackets loosely into the pre-drilled and anchored mounting holes in the countertop.

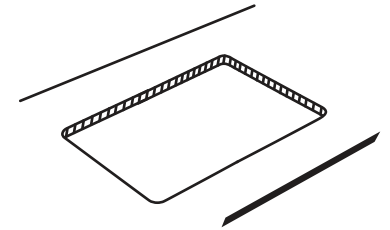


- 3 Apply silicone caulk (not included) evenly all around the top of the sink flanges.

Position and align the sink under the countertop opening. Press the silicone and flange up onto the countertop.

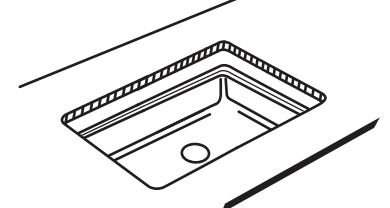

- 4 From the underside, lightly tighten the fasteners with a screwdriver until the sink is snug against the countertop.

Check alignment of the sink to the countertop opening and then tighten the fasteners until the sink is tight against the countertop. Do not over tighten.

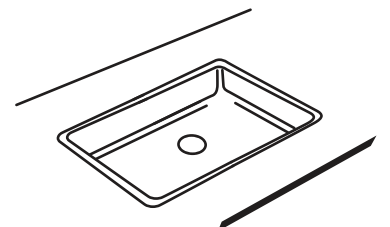


Wipe away any excess caulk with a rag.

Attention Installer:

- Elkay recommends that drop-in sinks should be installed by a professional, experienced installer.
- Elkay is not responsible for the sink or countertop if damaged during installation.
- It is recommended that the customer and installer discuss the desired finished appearance of the sink and countertop installation. Elkay is not responsible for improper sink and/or countertop installations.
- Follow all local plumbing and building codes.
- Inspect sink for damage prior to beginning installation.

Required Tools (not included)

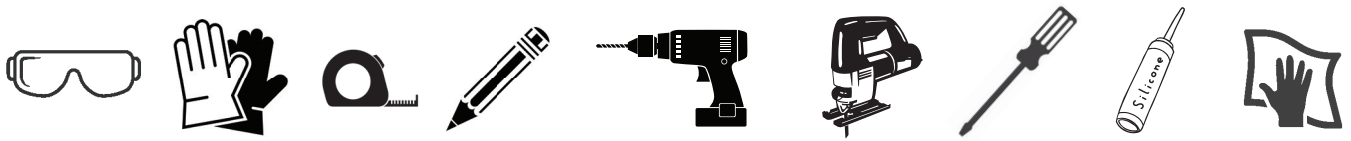



Installation



WARNING: Always wear safety goggles and gloves when using power tools or handling the sink to prevent personal injury.



- 1** Position the sink upside down on the countertop. Trace a line around the edge of the sink.

Draw a line 5/16" inside of the outline of the sink.

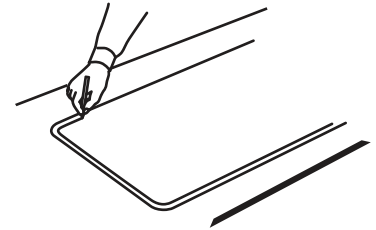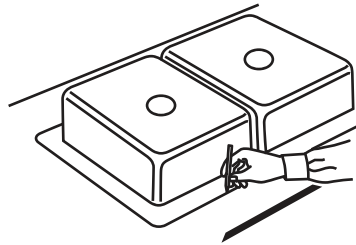

- 2** Drill a pilot hole in all four corners of the inside line. Use a saber or jig saw to cut on the inside line.



Place a support underneath the cutout portion of the countertop to prevent it from falling during cutting.

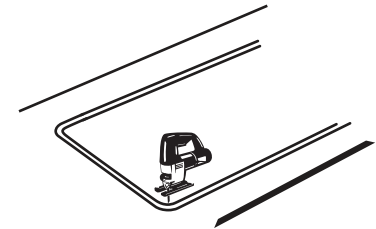

- 3** Apply silicone caulk (not included) around the cutout in the countertop surface.

Carefully lower the sink into the cutout.

Wipe away any excess caulk with a rag.

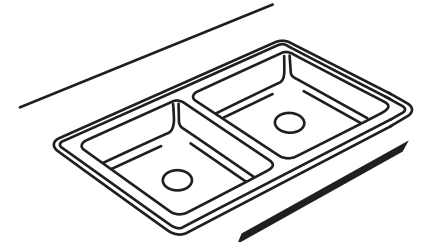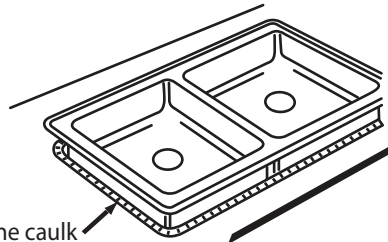

Silicone caulk
(Not included)