

SPECIFICATIONS

Model(s) A544912S-J

PRODUCT SPECIFICATIONS

Stainless Steel 16-3/4" x 15-1/2" x 13" Single Bowl Wall Hung Hand Wash Sink Kit w/Faucet + Drain + P-trap +TMV. Sink is manufactured from 20 gauge 304 Stainless Steel with a Buffed Satin finish, Center drain placement.

Material:	304 Stainless Steel
Finish:	Buffed Satin
Gauge:	20
Number of Bowls:	1
Sink Dimensions:	16-3/4" x 15-1/2" x 13"
Bowl 1 Dimensions:	12" x 9-1/4" x 6"
Drain Size:	2" (51mm)
Drain Location:	Center



Included with Product: LKB722C,
JI5FS,
LK723,
JT150

Quality Grade Plumbing Products.

Since 1933 we have become the industry standard for designing and producing quality grade plumbing products and fixtures. Our role as an industry leader remains unsurpassed.



Product Compliance: ASME A112.19.3/CSA B45.4
NSF 2
Faucet: NSF 372 (lead free)
ASME A112.18.1/CSA B125.1
NSF 61
Accessory: ASSE 1070
ASSE 1069
NSF 372 (lead free)
ASSE 1017
ASME A112.18.2/CSA B125.2



Sinks and faucets are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.

[Clean and Care Manual \(PDF\)](#)
[Installation Instructions \(PDF\) - 2000000893](#)
[Warranty \(PDF\)](#)

PART: _____ QTY: _____

PROJECT: _____

CONTACT: _____

DATE: _____


NOTES: _____

APPROVAL: _____

In keeping with our policy of continuing product improvement, Just Mfg reserves the right to change product specifications without notice. Please visit justmfg.com for the most current version of Just Mfg product specification sheets. This specification describes a product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



Model(s) A544912S-J

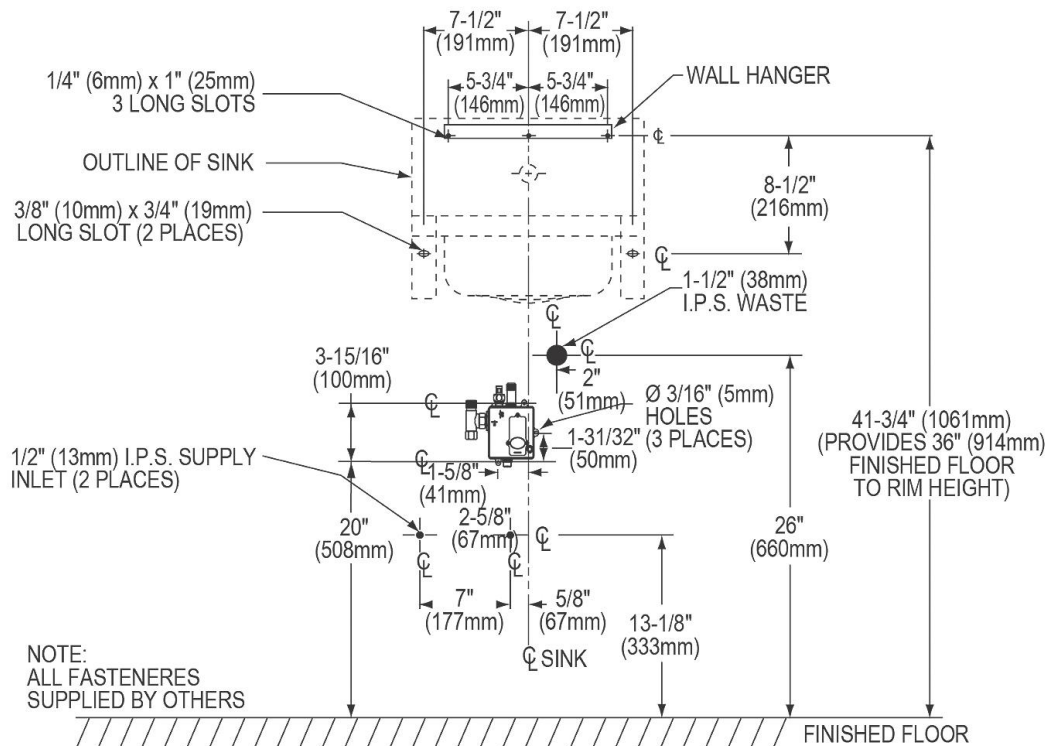

FOR CHS1716SSACMC

STOP VALVES,
FITTINGS &
3/8" (10mm)
SUPPLY LINES
(NOT SUPPLIED)

LK724-MANUAL
MIXING VALVE

TEMP.
ADJUST

FOR CHS1716SSACTMC

LK723
THERMOSTATIC
MIXING VALVE

COMPRESSION TO SWEAT
ADAPTER 3/8" (10mm) X 1/2" (13mm)
3-REQ'D & 1/2" (13mm) SUPPLY
TUBE (NOT SUPPLIED)

90° ST. EL.
(2 REQ'D) NOT SUPPLIED

TEMP.
ADJUST

STOP VALVES, FITTINGS
& 3/8" (10mm) SUPPLY LINES
(NOT SUPPLIED)

NOTE:
USE TEFLON TAPE FOR
ALL WATER CONNECTIONS.
DO NOT USE PIPE DOPE.

